


TOTALSOURCE®



PROPERTY OF TVH®

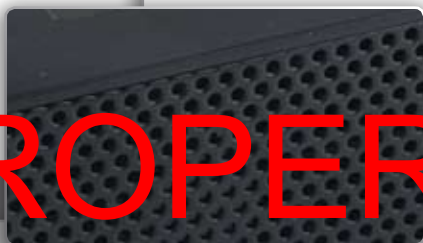

	PART #	VOLTAGE	DECIBELS	SIZE	A.A.D	P.P.	S.P.(V)	MOUNTING			CONFORMS TO:		
								H	V	U	SAE J994	CUL / UL	CE
1000 SERIES 	STA10302W	12-24VDC	85dB	2.25"W x 1.5"D x 2.94"H	.25	Y	No		*				
	STA10400W	12VDC	92dB	2.25"W x 1.5"D x 2.94"H	.35	Y	No		*				
2000 SERIES 	STA20302	12-24VDC	87dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*	D	*	*	
	STA20307	12-80VDC	87dB	4"W x 1.62"D x 2.73"H	<.6	Y	+290/-400		*	D	*	*	
	STA20502	12-24VDC	97dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*	C	*	*	
	STA20504	12-48VDC	97dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*	C	*	*	
	STA20507	12-80VDC	97dB	4"W x 1.62"D x 2.73"H	<.6	Y	+290/-400		*	C	*	*	
	STA20602	12-24VDC	102dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*		*	*	
	STA20154A	12-48VDC	77-97dB**	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*		*	*	
	STA20162A	12-24VDC	77-102dB**	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*		*	*	
2100 SERIES 	STA21502W	12-24VDC	97dB	4.25"W x 1.62"D x 2.74"H	<.6	Y	+100/-400		*	C	*	*	
	STA21602W	12-24VDC	102dB	4.25"W x 1.62"D x 2.74"H	<.6	Y	+100/-400		*		*	*	
2200 SERIES 	STA22702W	12-24VDC	107dB	4.25"W x 1.62"D x 2.74"H	<.8	Y	+100/-400		*	B	*	*	
2500 SERIES 	STA25302	12-24VDC	87dB	2.62"W x 1.62"D x 3.92"H	<.6	Y	+100/-400		*	D	*	*	
	STA25307	12-80VDC	87dB	2.62"W x 1.62"D x 3.92"H	<.6	Y	+290/-400		*	D	*	*	
	STA25502	12-24VDC	97dB	2.62"W x 1.62"D x 3.92"H	<.6	Y	+100/-400		*	C	*	*	
	STA25504	12-48VDC	97dB	2.62"W x 1.62"D x 3.92"H	<.6	Y	+100/-400		*	C	*	*	
	STA25507	12-80VDC	97dB	2.62"W x 1.62"D x 3.92"H	<.6	Y	+290/-400		*	C	*	*	
	STA25602	12-24VDC	102dB	2.62"W x 1.62"D x 3.92"H	<.6	Y	+100/-400		*		*	*	
	STA32102	12-24VDC	97dB	5"W x 3"D x 2.78"H	<.6	Y	+100/-400		*	C	*	*	
	STA32102	12-24VDC	102dB	5"W x 3"D x 2.78"H	<.6	Y	+100/-400		*		*	*	
3200 SERIES 	STA32102	12-24VDC	107dB	5"W x 3"D x 2.78"H	<.6	Y	+100/-400		*	B	*	*	
	STA32154A	12-48VDC	77-102dB**	5"W x 3"D x 2.78"H	<.6	Y	+100/-400		*		*	*	
	STA32274A	12-48VDC	82-107dB**	5"W x 3"D x 2.78"H	<.6	Y	+100/-400		*		*	*	
	STA32274A	12-48VDC	82-107dB**	5"W x 3"D x 2.78"H	<.6	Y	+100/-400		*		*	*	
3500 SERIES 	STA35272A	12-24VDC	82-107dB**	5"W x 4"D x 3.11"H	<.8	Y	+100/-400		*		*	*	
	STA35382A	12-24VDC	87-112dB**	5"W x 4"D x 3.11"H	<.8	Y	+100/-400		*		*	*	
	STA35582A	12-24VDC	97-112dB**	5"W x 4"D x 3.11"H	<.8	Y	+100/-400		*		*	*	
	STA35702	12-24VDC	107dB	5"W x 4"D x 3.11"H	<.8	Y	+100/-400		*	B	*	*	
	STA35802	12-24VDC	112dB	5"W x 4"D x 3.11"H	<.8	Y	+100/-400		*	A	*	*	
	STA35803	12-36VDC	112dB	5"W x 4"D x 3.11"H	<.8	Y	+100/-400		*	A	*	*	
4000 SERIES 	STA40802	12-24VDC	112dB	7.25"W x 4"D x 3.25"H	<.8	Y	+100/-400		*	A	*	*	
	STA40582A	12-24VDC	97-112dB**	7.25"W x 4"D x 3.25"H	<.8	Y	+100/-400		*		*	*	
5000 SERIES 	STA50154AW	12-48VDC	77-97dB**	4.3"DIA x 1.63"D	<.6	Y	+100/-400		*		*	*	
	STA50162AW	12-24VDC	77-102dB**	4.3"DIA x 1.63"D	<.6	Y	+100/-400		*		*	*	
	STA50502W	12-24VDC	97dB	4.3"DIA x 1.63"D	<.6	Y	+100/-400		*	C	*	*	
	STA50504W	12-48VDC	97dB	4.3"DIA x 1.63"D	<.6	Y	+100/-400		*	C	*	*	
	STA50602W	12-24VDC	102dB	4.3"DIA x 1.63"D	<.6	Y	+100/-400		*		*	*	
	STA50702W	12-24VDC	107dB	4.3"DIA x 1.63"D	<.6	Y	+100/-400		*	B	*	*	
DUAL FUNCTION 	STA20502DW	12-24VDC	97dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*	C	*	*	
	STA20602DW	12-24VDC	102dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*		*	*	
	STA35282AWT	12-24VDC	82-112dB or 112dB	5"W x 4"D x 3.11"H	<.8	Y	+100/-400		*		*	*	
DUAL TONE 	STA20102DT	12-24VDC	77dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*		*	*	
	STA20502DT-G	12-24VDC	97dB	4"W x 1.62"D x 2.73"H	<.6	Y	+100/-400		*		*	*	

PROPERTY OF TVH®


** Self adjusting alarms


All SAFE-T-ALERT® Back-Up Alarms are steam cleanable and feature a 2 year warranty


A.A.D. (Average Amp Draw), P.P. (Polarity Protected), S.P.(V) (Spike Protected(V)), Mounting H (Horizontal) V (Vertical) U (Universal)

ALARMS & BELLS ALARMAS Y CAMPANAS DE RETROCESO ALARMES & SONNERIES


	PART #	VOLTAGE	DECIBELS	CONFORMS TO
Back-up Alert®	SY1156 SY3156		87dB	



Motion Alarm	SYSW01	6-28VDC	68-80dB	
---------------------	--------	---------	---------	---




	PART #	VOLTAGE	DECIBELS
Alarm	STA290	12VDC	97dB




Bell	SY660 SY661		87dB 105dB
-------------	----------------	--	---------------











SWITCHES INTERRUPTORES COMMULATEURS



	PART #	AMP RATING	MOVEMENT
	SYSW-2	5AMP	One Way

	PART #	AMP RATING	MOVEMENT
	SYSWM-43	5AMP	360°

HORNS BOCINAS KLAXONS

	PART #	VOLTAGE	DECIBELS	SIZE	WARRANTY	CONFORMS TO
Light Duty 	SY110	36-48VDC	110dB	4.25" DIA	1 Year	
	SY113	12VDC	110dB	4.25" DIA	1 Year	
	SY115	24VDC	110dB	4.25" DIA	1 Year	
	SY118	72-80VDC	110dB	4.25" DIA	1 Year	

Heavy Duty 	SY100	12VDC	120dB	5" DIA	1 Year	
	SY101	24VDC	120dB	5" DIA	1 Year	
	SY103	48VDC	120dB	5" DIA	1 Year	
	SY105	36-48VDC	120dB	5" DIA	1 Year	
	SY125	36VDC	120dB	5" DIA	1 Year	

Electronic Horn 	STA22704HW	12-48VDC	107dB	3.25" W x 1.62" D x 2.74" H	1 Year	
--	------------	----------	-------	-----------------------------	--------	---

3200 Series 	STA32704HW	12-48VDC	107dB	5" W x 3" D x 2.78" H		
---	------------	----------	-------	-----------------------	--	---


	PART #	SIZE	VOLTAGE	DECIBELS	CONFORMS TO
	SY102	5" DIA	36VDC	111dB	
	SY106	3.4375" DIA	48VDC	115dB	
	SY107	4.625" OD	12-48VDC	107dB	
	SY108	4" DIA	12VDC	116dB	
	SY109	3.5" DIA	24-48VDC	116dB	
	SY111	4.25" DIA	12VDC	110dB	
	SY112	4" DIA	12-48VDC	107dB	

	PART #	SIZE	VOLTAGE	DECIBELS	CONFORMS TO
	SY114	4" DIA	24VDC	108dB	
	SY116	3.875" DIA	36-48VDC	104-114dB	
	SY117	3.5" DIA	24VDC	110dB	
	SY119	3.875" DIA	36-48VDC	105dB	
	SY120	3.875" DIA	72-80VDC	105dB	
	SY121	3.5" DIA	12VDC	110dB	

PROPERTY OF TVH®

TOTAL SOURCE®

SAFE-T-ALERT®

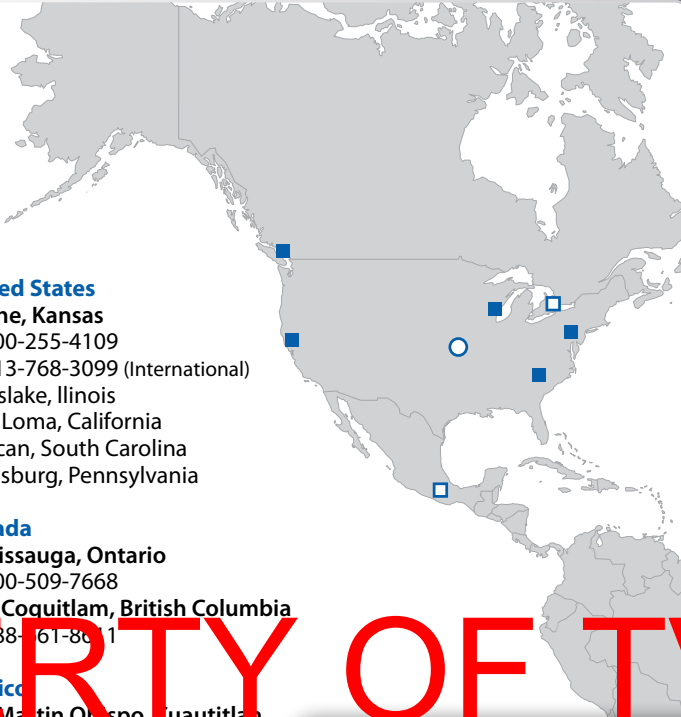

United States

- Olathe, Kansas
+1 800-255-4109
+1 913-768-3099 (International)
Grayslake, Illinois
Mira Loma, California
Duncan, South Carolina
Harrisburg, Pennsylvania

Canada

- Mississauga, Ontario
+1 800-509-7668
Port Coquitlam, British Columbia
+1 888-661-8611

Mexico

- San Martín Ocosingo, Quauhtlan
+52 55-5861-8550

PROPERTY OF TVH®



Systems Material Handling
www.smhco.com | www.irmn.com