

ECOLIFT PALLET TRUCK

TOTALSOURCE®

FEATURED PRODUCTS

Standard Features for Ecolift model.

- Safety spring loaded handle allows load to be lowered while in motion to act as a brake
- High Tensile steel frame and seamless forks
- Entry and exit rollers for easy entry and exit of pallets
- Painted quality safety color after anti-trust treatment
- 230° pivot action enables maneuvering in compact areas
- Lifting, neutral and lowering positions with handle
- 5,500 capacity
- Spring-a-matic handle self returns
- Fork length: 48"
- Fork width: 6"
- Width across forks: 27"/20.5"
- Space Between forks: 15"/8.5"
- Body Length (including pump): 16"
- Steer wheels: 7" x 2"
- Load wheels: 2.9" x 3.625"
- Lowered height of forks: 2.9"
- Raised height of forks: 7.75"
- Aproximate weight: 202/192lbs
- One year standard warranty
- Two year warranty on hydraulic unit by replacement part

EO5500

27" x 48" (686mm x 1219mm) Single poly steer & load wheels

EO5501

20.5" x 48" (521mm x 1219mm) Single poly steer & load wheels




EO5500, EO5501 HANDLE ASSEMBLY

Hand Lowering Control-3 positions

- Lifting-neutral-lowering with handle or foot pedal means extra safety
- Neutral allows pumping at the most convenient angle to the operator and free handle movement when the truck is in motion
- The handle returns automatically to the vertical position

BRAKE

- Safety spring-loaded handle allows load to be lowered while in motion to act as a brake

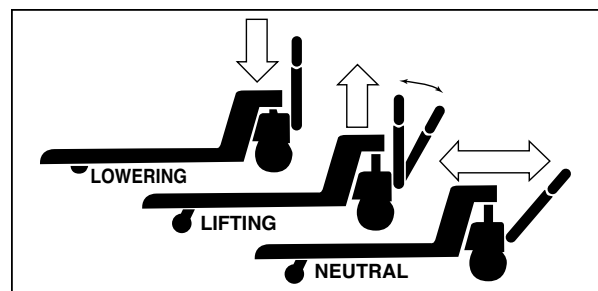

United States
P: 800 255 4109
F: 913 764 7278

International
P: +1 913 768 3099
F: +1 913 829 6206

Canada (ON)
P: 800 509 7668
F: 905 564 5717

Canada (BC)
P: 888 661 8611
F: 604 944 7024

Mexico
P: +52 55 5861 8550
F: +52 55 5819 3004